






COMPONENTS

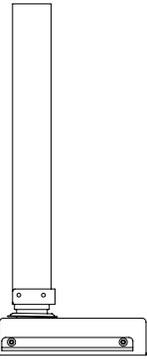

Column/Control Box

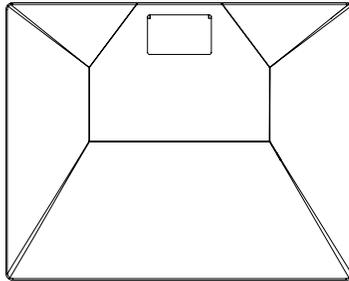


Base

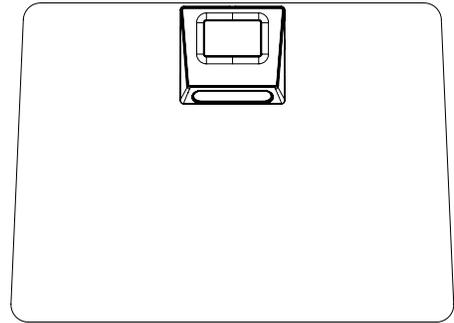


Primary Worksurface & Handset




Power Cord



Monitor Holder




Support Plate



M6X14
x4



M6X8
x4

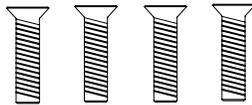

M6X25
x4




M6X12
x4




M4X10
x1

OPTIONAL

Keyboard Tray

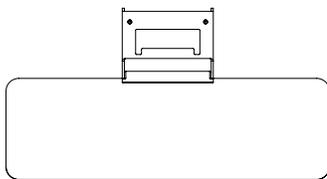

Keyboard Tray Assembly




Keyboard Bracket




M6X12
x4


Dual Monitor



Monitor Holder



Dual Monitor Mount



M6X10 Hand Screw
x4

SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, including the following: Read all instructions before using (this furnishing). PLEASE SAVE THESE INSTRUCTIONS IN AN OBVIOUS PLACE FOR THE END USER AFTER ASSEMBLY.

WARNING

To reduce the risk of burns, fire, electric shock or injury to persons:

1. Always unplug this furnishing from the electrical outlet before cleaning.
2. Use this table only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
3. Never operate this table if it has a damaged cord or plug, if it is not working properly, or if it has been dropped or damaged.
4. Keep the cord away from heated surfaces.
5. Never drop or insert any object into any opening.
6. Do not use outdoors.
7. Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
8. For loading always put heavier items at the bottom and not near the top in order to help prevent the possibility of the furnishing tipping over.
9. Do not sit/stand on product.
10. Inspect regularly, stop using if damaged or loose parts found.

The desk or table shall be installed near power socket & the plug shall be easily accessible.

WARNING - Risk of fire and shock

GROUNDING INSTRUCTIONS (for grounded products only) - Some products must be grounded. Connect these types of appliances to a properly grounded outlet in accordance with all local codes and ordinances.

For products sold in North America and other 120V regions: the product is for use on a nominal 120-V circuit. These products use a grounded plug that looks like the plug illustrated in sketch A in Figure 2. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product. **WARNING - Risk of fire and shock, Use only type SJT 18 AWG cord.**

PLUG ILLUSTRATION DISCLAIMER - Illustrations shown here may not match your product. Depending on your region, the plug pin size and shape may change.

OPERATING INSTRUCTIONS

Please refer to the User Guide, which is available online.

Products with Polarized Plugs




Figure 1
Polarized Plug

Products with Grounded Plugs






Figure 2
Grounding methods

INSTALLATION


Step 1

Use M6X14 screws (x4) to assemble base to column. Wire the column to the control box.

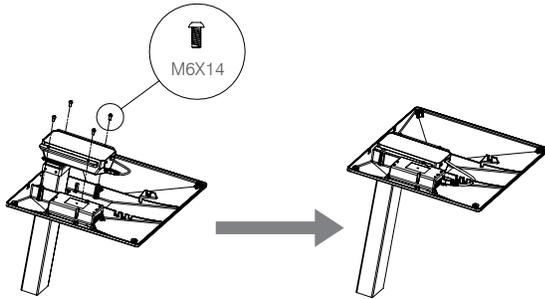


Step 2

Use M6X8 screws (x4) to assemble the support plate to pre-drilled holes at the bottom of column.

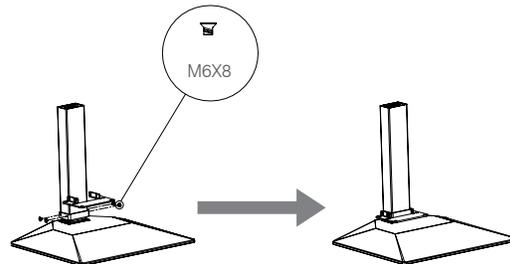


Step 3

Slide the primary worksurface over the column and set column to lowest position.

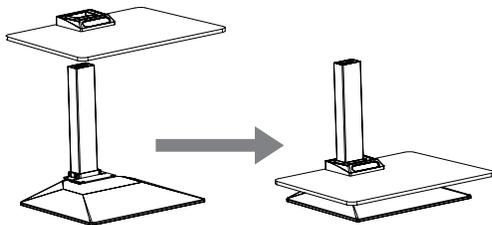

Step 4


Wire the handset to the control box and plug in the power cord. Raise the column at least 8 inches. Use M6X25 screws (x4) to mount to primary worksurface to support plate.

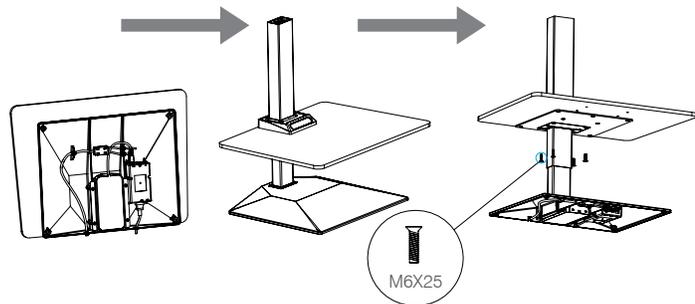

NOTE: The maximum weight capacity for primary worksurface is 55 lbs.

Step 5

Use M6X12 screws (x4) to attach monitor holder to top of column. Remove the M4X10 screw under the monitor holder to release the VESA plate. Attach the VESA plate to the monitor and resecure to monitor holder with the M4X10 screw.

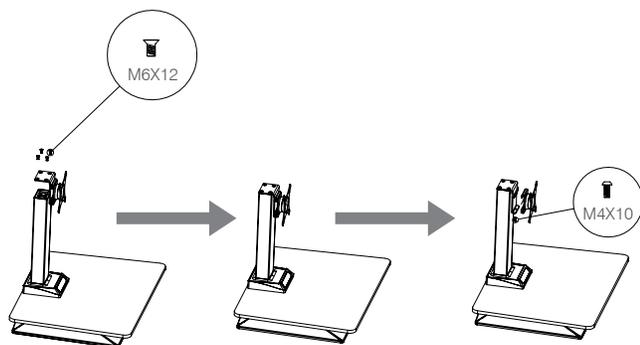


NOTE:

1. For single monitor mount, the maximum monitor size allowed is 43" and maximum weight capacity for monitor is 20 lbs.
2. For safety and avoiding product tipping, if keyboard tray is to be assembled, please assemble the keyboard tray first before installing the monitor mount and monitor.

KEYBOARD TRAY

Step 1


Using the M6X12 screws (x4), attach the keyboard bracket to primary worksurface via the predrilled holes on the bottom of primary worksurface.

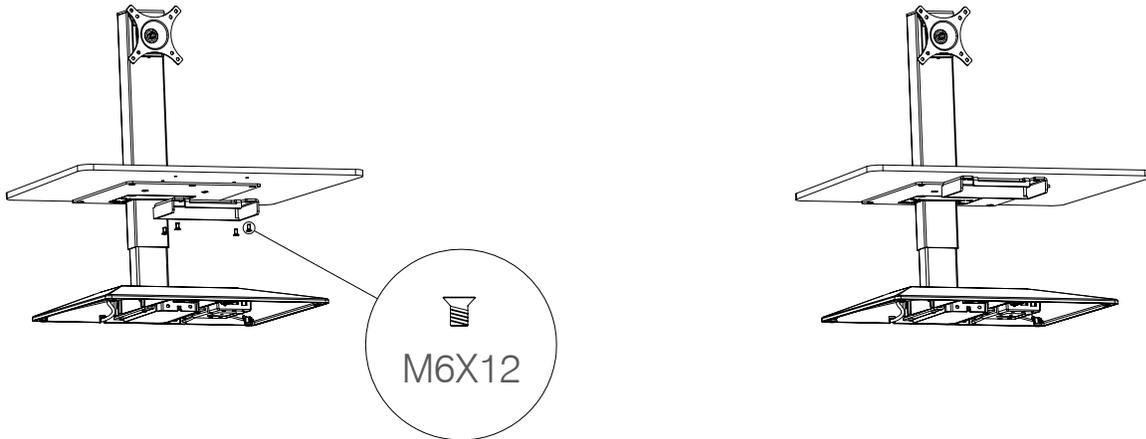

Step 2

Insert Keyboard Tray Assembly into the Keyboard Bracket until the pin releases and keyboard tray is firmly secured.

Installation of your DT Riser is complete.

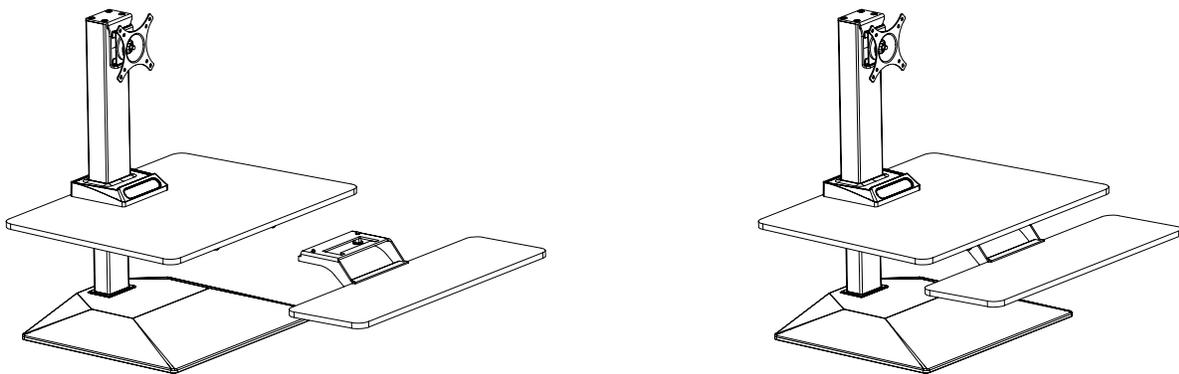


NOTE: The maximum weight capacity for keyboard is 13.5 lbs.

DUAL MONITOR MOUNT

Step 1


Use M6X12 screws (x4) to attach the dual monitor mount to top of the column.

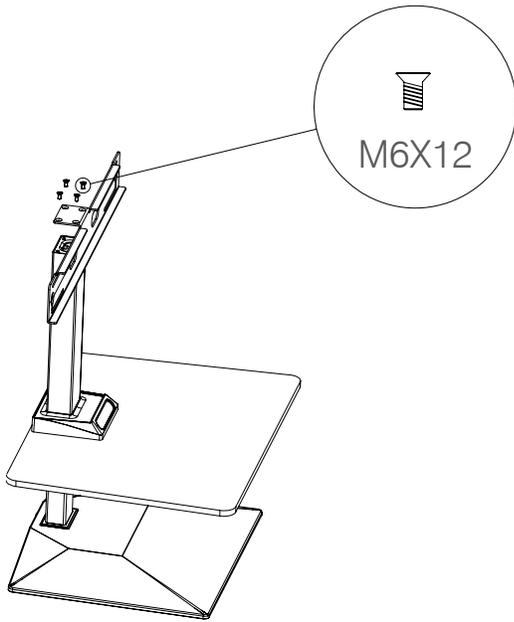

Step 2


Prior to installing the monitors to the unit, use the monitor mount screws from your monitor to attach the VESA plates to each respective monitor.

Note: Single monitor holder is re-used for the dual monitor mount assembly.

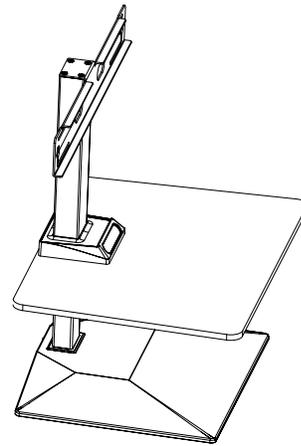

Step 3

Use the M6X10 hand screws (x4) to fasten monitor holder to dual monitor mount through the horizontal cut-outs in the mount.

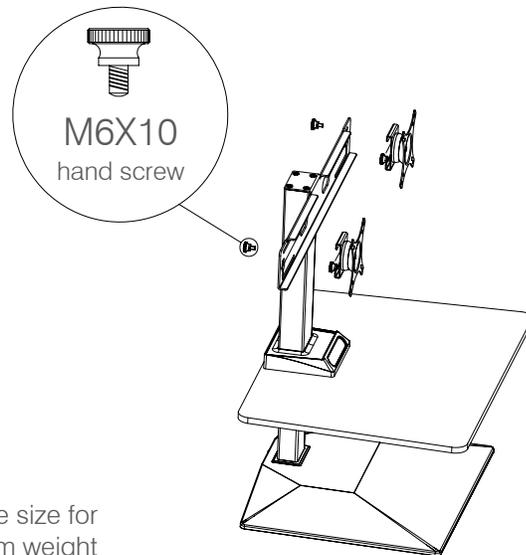


! SAFETY NOTES:

1. For dual monitor mount, the maximum allowable size for each monitor is 24" wide, and the total maximum weight capacity for both monitors is 20 lbs.
2. For safety and structural integrity, always install keyboard tray first if it's to be included in the assembly.

ADJUSTING VESA MOUNT TENSION


Step 1

Remove the M4X10 screw to release the VESA mount.

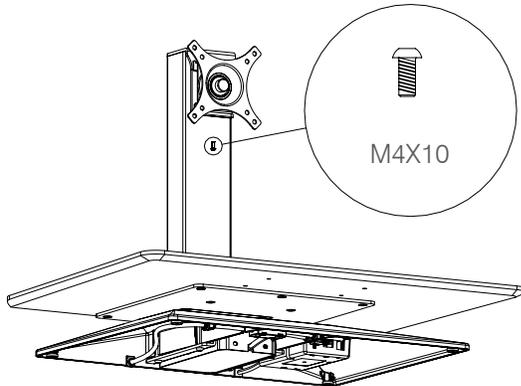


Step 2

Take off rubber cover on the VESA mount to expose the M8 screw.

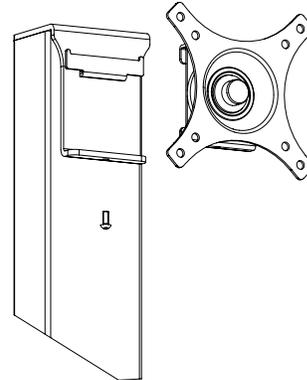


Step 3

Use a 13mm wrench to adjust the M8 screw on the VESA mount for appropriate tension — clockwise to increase tension (for larger monitors) and counterclockwise to decrease tension (smaller monitors).

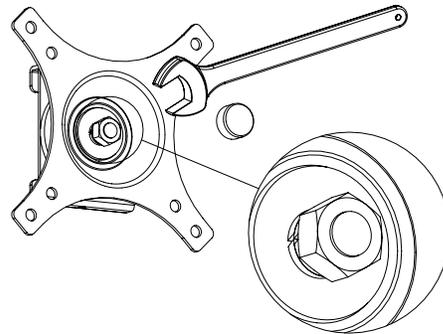

BOTTOM WIRING

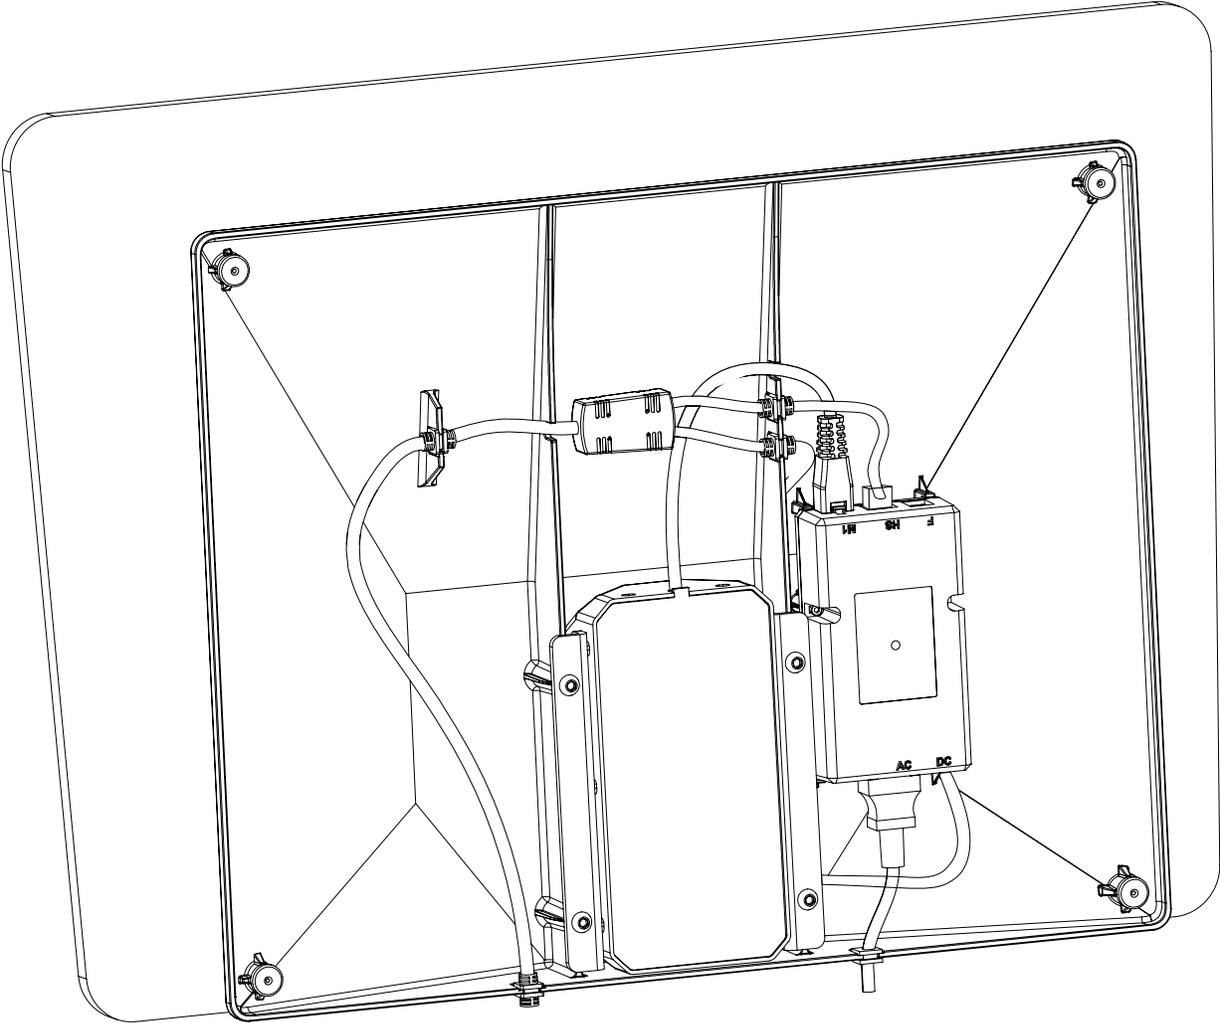

Please contact cc@amqsolutions.com if you are missing any parts, have difficulty with assembly, or have any product related questions.