





**COMPONENTS**

---

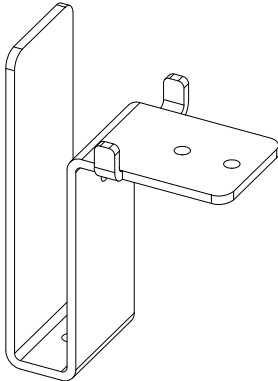

Under Mounted Bracket  
x2




Self Tapping Screw  
x8

## PHASE 1 | Back Screen

---

### Step 1

Place the bracket at the edge of the worksurface as shown in below image.

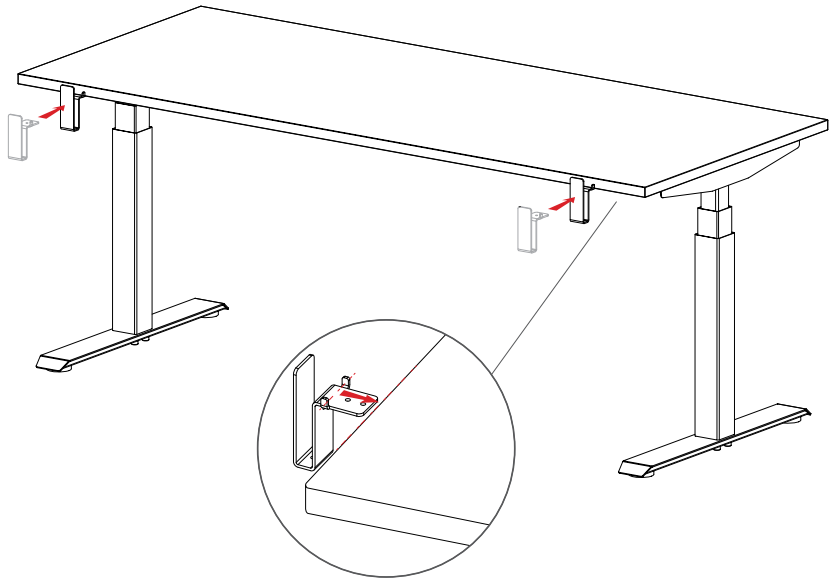


### Step 2

Align the sleeve brackets to the back edges of worksurface.

Place each bracket 5 to 10 inches from the edge of the worksurface on both sides.

Secure each bracket with 2 pieces of self tapping screws.

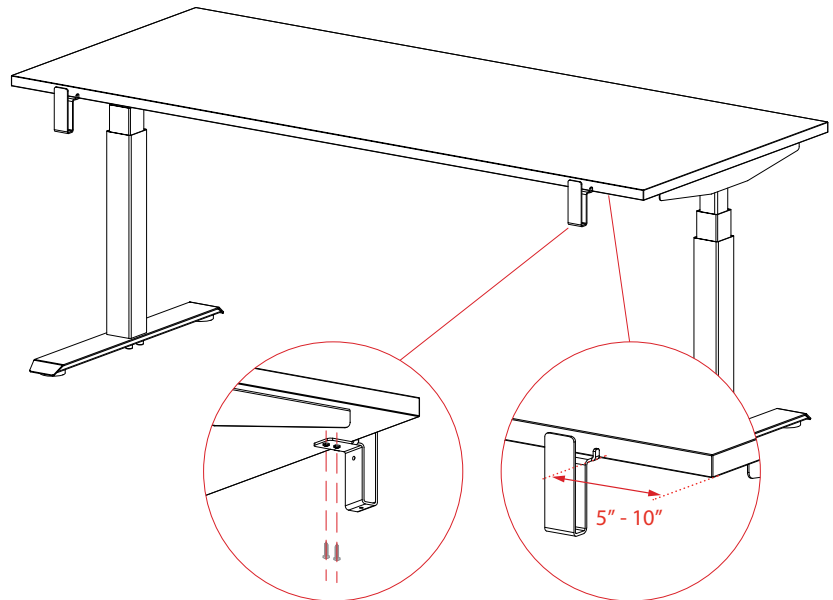


## PHASE 1 | Back Screen

---

### Step 3

Insert back screen into the mounted sleeve brackets and adjust to be centered with the worksurface.

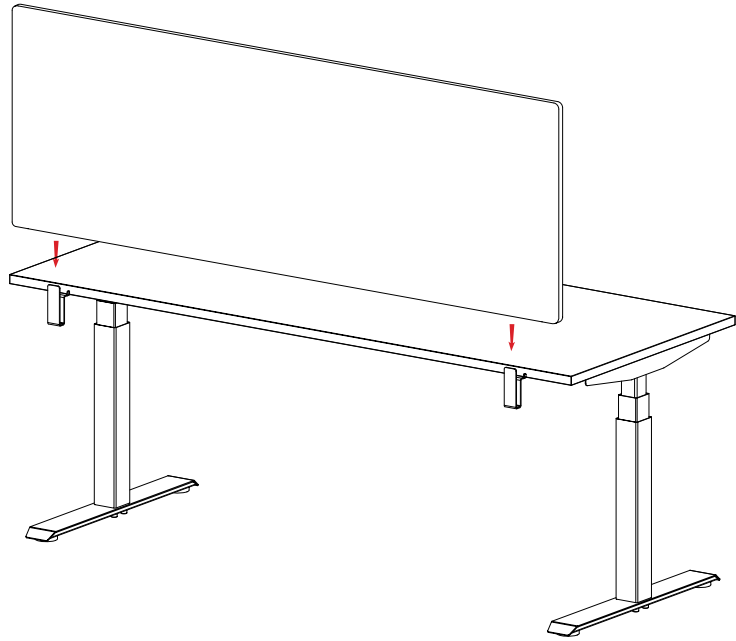


### Step 4

Screw in one self tapping screw through the provided screw hole on the inside of the sleeve bracket to secure the bracket with the back screen.

An additional self tapping screw can be used for added rigidity through the screw hole on the bottom of the sleeve bracket.


**NOTE:** Make sure to set your power tool at low torque for inserting screws into the screen.

Your set up is now complete.

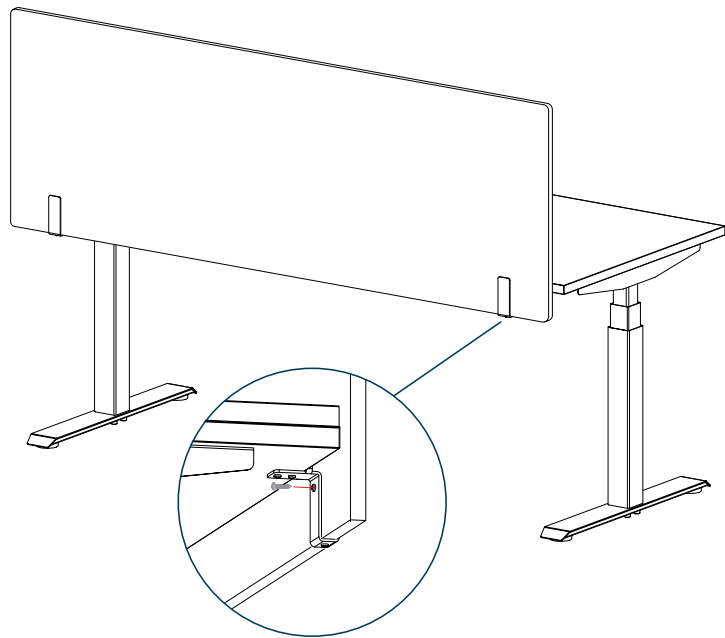

## PHASE 2 | Side Screen


**NOTE:** on a 24" deep worksurface at least 1-5/8" clearance is required between the edge of the worksurface and the cantilever.

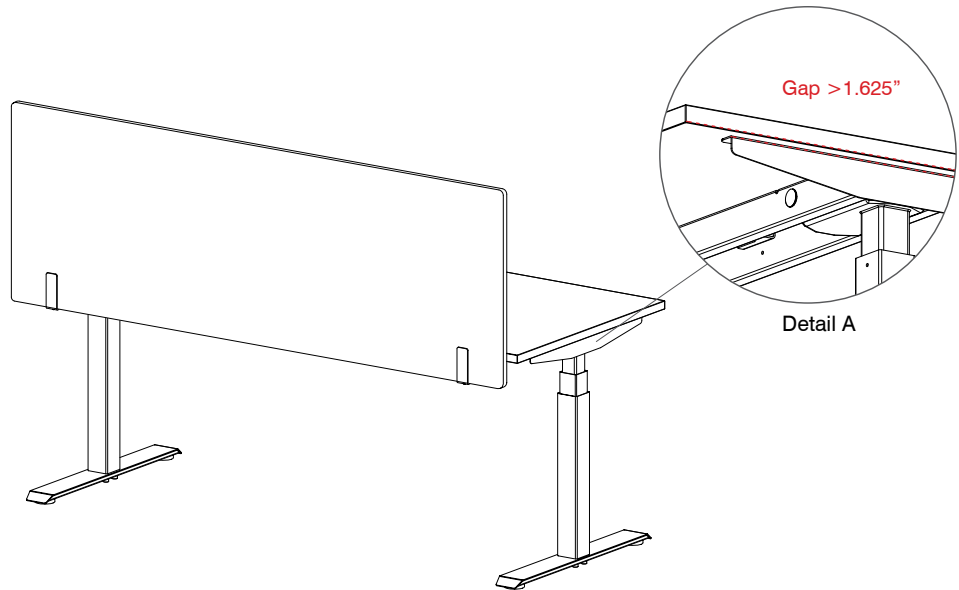

### Step 1

Mount two brackets on each side of the worksurface.

Recommended distance from the edge of the worksurface is 1.5 to 3 inches as shown in "Detail B".

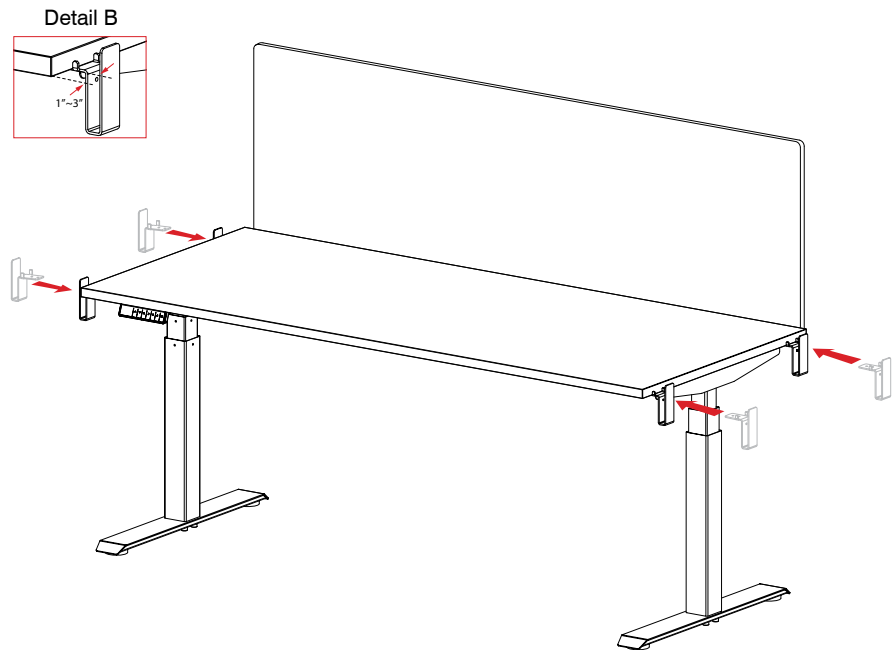


## PHASE 2 | Side Screen

---

### Step 2

Insert side screens into the mounted sleeve bracket and adjust the screen to center with the worksurface.

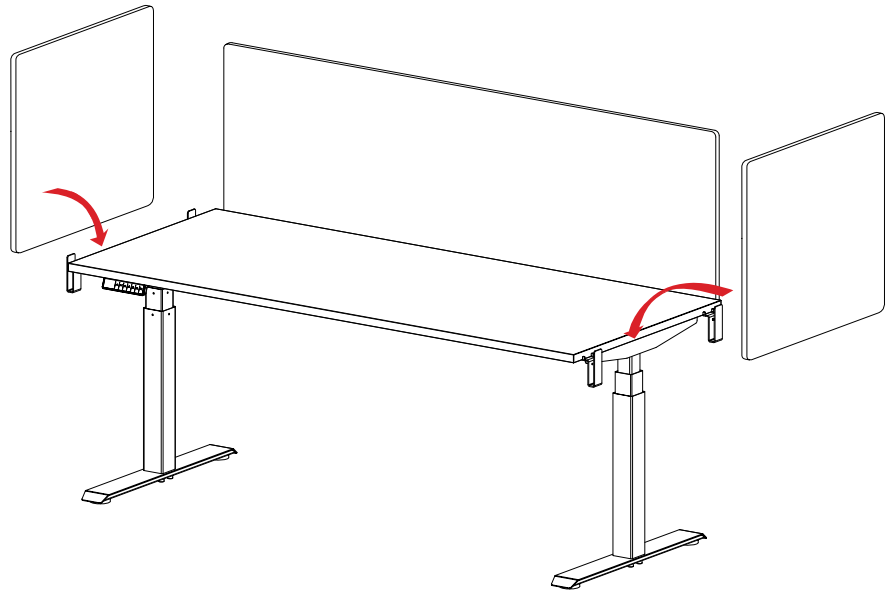


### Step 3

Screw in one self tapping screw through the provided screw hole on the inside of the sleeve bracket to secure the bracket with the side screen.

An additional self tapping screw can be used for added rigidity through the screw hole on the bottom of the sleeve bracket.

Your set up is now complete.

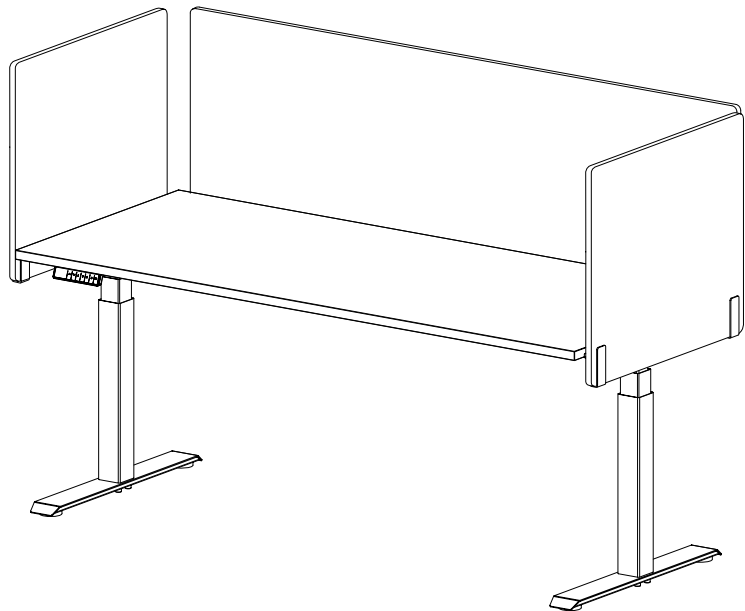

Please contact [cc@amqsolutions.com](mailto:cc@amqsolutions.com) if you are missing any parts, have difficulty with assembly, or have any product related questions.