

ASSEMBLY INSTRUCTIONS

HEADBOARD ONLY & HEADBOARD ONLY WITH WA FRAME
(HO, HO-WF)

PRE-ASSEMBLY

- ☐ **Please remove staples from the box before removing the bed.** This will reduce the possibility of scratching the bed's finish with the staples.
- ☐ Read all instructions carefully before beginning assembly. Assembly by two people is recommended.
- ☐ Tools required: Philips screwdriver and 7/16" wrench (or adjustable wrench).

PARTS INCLUDED

- ☐ (1) Headboard
- ☐ (2) Siderails with welded support tubes **A**
- ☐ (3) Cross Slats w/ V-Shaped Support **B**
- ☐ Hardware Packet packed with Frame
- ☐ Hardware Packet packed with Headboard

HARDWARE PACKET

HARDWARE PACKET WITH FRAME

- ☐ **a** (10) 1/4" - 20 x 1" Black Hex Bolts
- ☐ **b** (10) 1/4" - 20 x 3/4" Black Flathead Bolts
- ☐ **c** (10) 1/4" Black Flat Washers
- ☐ **d** (10) 1/4" - 20 Black Serrated Nuts

HARDWARE PACKET WITH HEADBOARD

- ☐ **e** (4) 1/4" - 20 x 2 1/2" Roundheaded Bolts
- ☐ **f** (4) 1/4" - 20 Hex Nut
- ☐ **c** (4) 1/4" Flat Washers

*Length of the Roundheaded bolts may vary depending on the bed style

ASSEMBLY INSTRUCTIONS

- ☐ Determine the location for the bed, and place Headboard in an upright position.
- ☐ Lift Siderail **A** and align with the holes at the base of the Headboard. See **Figure 1**.
- ☐ Attach the Siderails **A** to 2 holes in the Headboard. Insert a Roundhead Bolt **e** through a Flat Washers **c**. Then insert that Roundheaded Bolt through a hole in the Headboard, and thread a Hex Nut **f** onto the Roundhead Bolt **e** from the other side of the Headboard. Hand-tighten only at this stage.

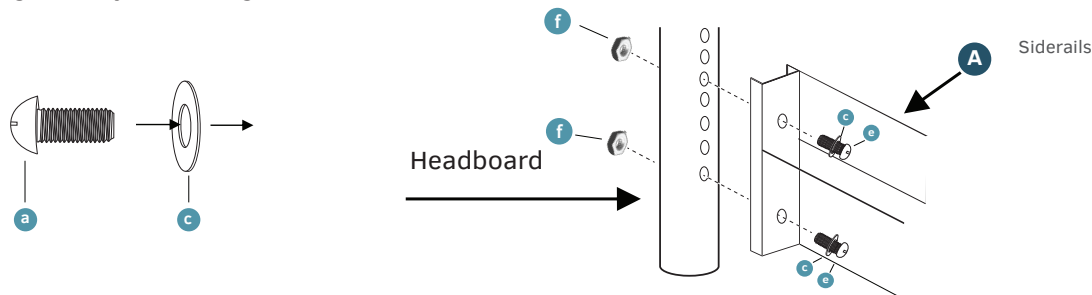


Figure 1

- ☐ To attach Cross Slats **B** to the Siderails **A**, place the Cross Slat beneath the lip of the Side Rail.
- ☐ Align the Cross Slat **B** with the holes in the Siderail. Attach using a flathead Bolt **b** from above, and a Serrated Nut **d** from below. See **Figure 2**.
- ☐ Note: Fully tighten all bolts. Do not over-tighten, as that could damage the screw threads.


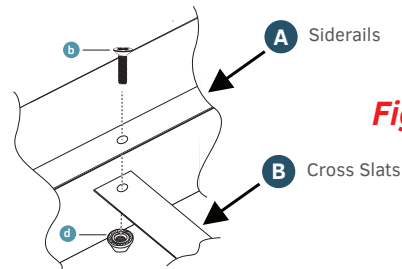


Figure 2

- ☐ See **Figure 3** for order of cross slats in sizes Double, Queen & King.

Figure 3



MAINTENANCE

- ☐ Periodically re-tighten all bolts.
- ☐ To clean, wipe with a soft dry or slightly damp cloth. Never use harsh cleaners or abrasives.