



Food Warmers Twin & Triple Food Servers

Models Twin FS-4
Triple FS-4

Date:

Project:

Quantity:

Item Number:



Twin FS-4 #81200



US LISTED

ALSO AVAILABLE
FOR EXPORT

NSF-certified as a rethermalization unit



Triple FS-4 #85900



US LISTED

NSF-certified as a rethermalization unit



Warranty

Server Products equipment is backed by a two-year limited warranty against defects in materials and workmanship. For a copy of our complete warranty statement, see our Website or contact us.

Bid Description

The twin and triple food servers are water bath warmer/cookers constructed of stainless steel with a brushed (#4) finish. Inset and lid assemblies are included. Hinged lids stay upright during ladling and feature a rim that collects moisture and returns it to the food. Insets have a 4-quart (3.8 L) capacity each. Power is controlled with individual ON/OFF rocker switches for each food vessel.

Adjustable precalibrated thermostats control individual 500 watt heating elements. Temperature settings—marked on thermostat knobs—range from 100° F (38° C) to 200° F (93° C).

Both Twin and Triple FS-4 units heat frozen product to serving temperature and are NSF-listed for rethermalization.

Standard Features

All stainless steel construction for durability

NSF-certified as a rethermalization unit

Lid rim returns moisture to the food to retain flavor

Hinged lids stay upright during ladling for easy customer use

Adjustable precalibrated thermostats for accurate heat control

Temperature marks on knobs with protective knob guards

Water fill lines eliminate overflow accidents

Accessories

- ☐ 4-quart (3.8 L) Inset & Lid Assembly #81050
- ☐ 2-ounce (59 mL) Ladle #82660
- ☐ 4-ounce (118 mL) Ladle #82574
- ☐ 6-ounce (177 mL) Ladle #82661
- ☐ 8-ounce (237 mL) Ladle #82662



Specifications on reverse side



Food Warmers Twin & Triple Food Servers

Models Twin FS-4
Triple FS-4

Food Servers

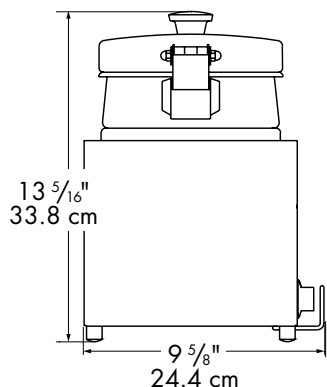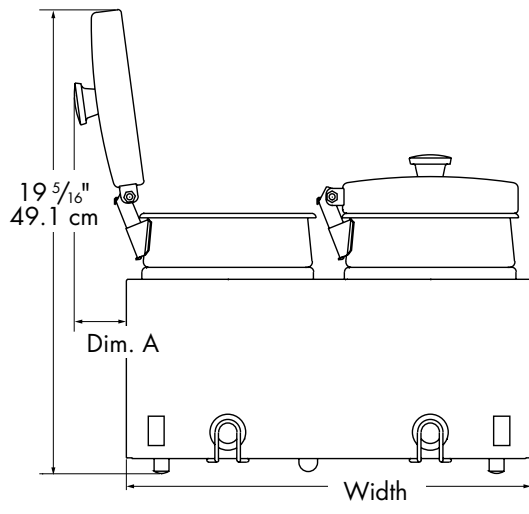

Specifications

Model	Twin FS-4 #81200				
Construction	All stainless steel with a brushed (#4) finish. Complete with two insets and lid assemblies.				
Capacity	2 insets hold 4-quarts (3.8 L) each; 8-quart (7.6 L) total.				
Dimensions		<u>Height</u>	<u>Width</u>	<u>Depth</u>	<u>Dim. A</u>
	in	13 ⁵ / ₁₆	17	9 ⁵ / ₈	2 ³ / ₁₆
	cm	33.8	43.2	24.4	5.6
	Height with lid open: 19 ⁵ / ₁₆ " (49.1 cm)				
Electrical	120V, 60Hz, 1000W, 8.3A 72 in (183 cm) cord set NEMA 5-15P, 15A, 125V PLUG				
Ship Weight	20 lb (9.1 kg)				
Model	Triple FS-4 #85900				
	Same as above except:				
Capacity	3 insets hold 4-quarts (3.8 L) each; 12-quart (11.4 L) total.				
Dimensions		<u>Height</u>	<u>Width</u>	<u>Depth</u>	<u>Dim. A</u>
	in	13 ⁵ / ₁₆	25 ¹ / ₂	9 ⁵ / ₈	2 ³ / ₁₆
	cm	33.8	64.8	24.4	5.6
	Height with lid open: 19 ⁵ / ₁₆ " (49.1 cm)				
Electrical	120V, 60Hz, 1500W, 12.5A				
Ship Weight	27 lb (12.2 kg)				

FOB Richfield, Wisconsin 53076

CAD Library

We are a member of The KCL CADalog with more than 100 other manufacturers. Our CAD files can be purchased through Kochman Consultants, Ltd. at 847-470-1195 or e-mail sales@kclcad.com. Their Website is at www.kclcad.com.

