Ice-O-Matic

ICEU220/225/226 - Self Contained Cube Ice Maker



Features

- Space saving 24" (610 mm) wide undercounter design.
- Produces up to 251 lbs (114 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

Options & Accessories

Water Filters					
Ice Machine	Mar	Inline			
Model	System	Replacement	System		
ICEU220	IFQ1	IOMQ (1)	IFI4C / IFI8C		
ICEU225	IFQ1	IOMQ (1)	IFI4C / IFI8C		
ICEU226	IFQ1	IOMQ (1)	IFI4C / IFI8C		

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form



Full Cube						
W x D x H (in)						
W x D x H (mm)	22 x 22 x 22					
Half Cube						
W x D x H (in)	7/8 x 7/8 x 3/8					
W x D x H (mm)	22 x 22 x 10					

Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Stores up to 100 lbs (45 kg) of ice.
- Easy front access to ice.
- · Available with an air-cooled or water-cooled condenser.



















Ice-O-Matic

Air and Water Cooled

- A. Ice maker water in 3/8" FPT.
- B. Bin and ice maker drain, 3/4" FPT.
- **C.** Hole for electrical connections, %". (Cord on 115)
- **D.** Condenser water in, 3/8" FPT (water cooled units only)
- **E.** Condenser water out, ½" FPT (water cooled units only).



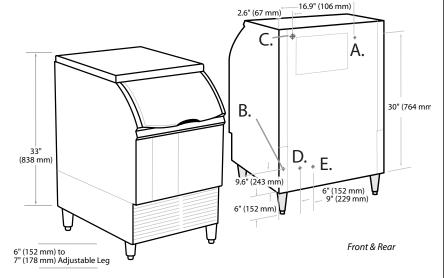

Operating Requirements

Minimum		Maximum			
		60 Hz	50Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)		
Water Temp.	40°F (4.4°C)	100°F (38°C)	110°F (43°C)		
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4	4.1 BAR)		

Dimensions

All Models						
W x D x H (inches)	24 x 24 x 39					
W x D x H (mm)	610 x 610 x 991					

Specifications

		Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used per 100 lbs				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICEU220A ★	Air	238 (108)	175 (80)	30.3	-	8.8	115/60/1	11.9	15	4,609
ICEU220W	Water	251 (114)	193 (88)	36.9	175	6.6	115/60/1	8.9	15	4,288
ICEU225A	Air	211 (96)	143 (65)	32.7	-	8.8	230/50/1	4.9	16	3,774
ICEU225W	Water	210 (95)	174 (79)	36.6	156	6.3	230/50/1	4.1	16	3,780
ICEU226A	Air	241 (110)	168 (76)	30.6	-	8.5	208-230/60/1	6.0	15	4,321
ICEU226W	Water	232 (105)	192 (87)	36.3	167	6.6	208-230/60/1	4.4	15	4,263

NOTES:

Number of Wires: 3 (including ground)

Approx. Shipping Weight lbs (kg): ICEU220A 160 (73) • ICEU220W 160 (73) • ICEU225A 160 (73) • ICEU225W 160 (73) • ICEU226W 160 (73) • ICEU226W 160 (73)

Refrigerant Type

★ ENERGY STAR qualified machine.

Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates

11100 E. 45th Avenue Denver, CO 80239 Phone: 1. 866. PURE. ICE Fax: 303. 371. 6296 www.iceomatic.com

Rev: Part: A-02/09 1020