Ice-O-Matic

ICEU300/305 - Self Contained Cube Ice Maker



ICEU300

Features

- Space saving 30" (762 mm) wide undercounter design.
- Produces up to 356 lbs (162 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

Options & Accessories

Water Filters					
Ice Machine	1	Inline			
Model	System	System			
ICEU300	IFQ1	IOMQ (1)	IFI4C / IFI8C		
ICEU305	IFQ1	IOMQ (1)	IFI4C / IFI8C		

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years Parts and Labor on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form



Full Cube					
W x D x H (in)					
W x D x H (mm)	22 x 22 x 22				
Half Cube					
W x D x H (in)	%x %x ¾				
W x D x H (mm)	22 x 22 x 10				

Space-Saving Solutions

- Front air discharge design for compact spaces.
- · Low profile top saves counter space.
- Stores up to 130 lbs (59 kg) of ice.
- Easy front access to ice.
- Available with an air-cooled or water-cooled condenser.



















Ice-O-Matic

Air and Water Cooled

- A. Ice maker water in 3/8" FPT.
- B. Bin and ice maker drain, 3/4" FPT.
- **C.** Cord on HSV, hole on all others for electrical connections, %".
- **D.** Condenser water in, %" FPT (water cooled units only).
- **E.** Condenser water out, ½" FPT (water cooled units only).



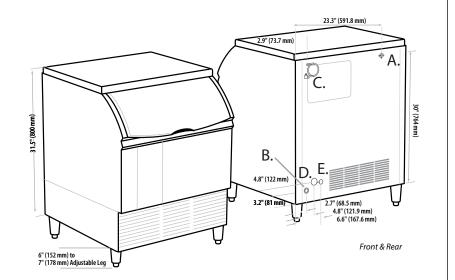

Operating Requirements

	Minimum	Maximum			
		60 Hz	50Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)		
Water Temp.	40°F (4.4°C)	100°F (38°C)	110°F (43°C)		
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)			

Dimensions

All Models						
W x D x H (inches)	30 x 29 x 39					
W x D x H (mm)	762 x 737 x 991					

Specifications

		Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used per 100 lbs				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICEU300A★	Air	309 (140)	228 (104)	32.9	-	8.6	115/60/1	13.1	15	5,928
ICEU300W	Water	356 (162)	296 (135)	35.6	175	5.7	115/60/1	11.1	15	6,097
ICEU305A	Air	299 (136)	223 (101)	30.8	-	7.7	230/50/1	6.6	16	5,392
ICEU305W	Water	314 (143)	267 (121)	33.9	145	5.4	230/50/1	8.3	16	5,353

NOTES:

Number of Wires: 3 (including ground)

Approx. Shipping Weight lbs (kg): ICEU300A 206 (94) • ICEU300W 203 (92) • ICEU305A 206 (94) • ICEU305W 203 (92)

efrigerant Type

★ ENERGY STAR qualified machine.

Please see our website www.iceomatic.com for the latest list of ENERGY STAR qualified machines and available rebates

11100 E. 45th Avenue Denver, CO 80239 Phone: 1. 866. PURE. ICE Fax: 303. 371. 6296 www.iceomatic.com

Rev: Part: A-02/09 1022