



ROYAL SERIES PLUMBING

ELECTRONIC FAUCETS

MODEL: _____ PROJECT: _____ ITEM #: _____ QTY: _____

PRODUCT IMAGE



16-190 SHOWN

**THIS PRODUCT DOES NOT REQUIRE
LOW LEAD COMPLIANCE**

STANDARD FEATURES

- Single hole wall mount chrome plated faucet
- Infrared sensor turns water on and off for hands free, fast and safe operation
- Operates on battery (included) or power supply (optional)
- Battery life: 1-3 years (based on usage)
- Built-in low battery indicator light
- Ideal for all hand sinks, hospitals, scrub sinks, lavatories and food establishments
- Ideal for retro-fit, easy installation
- Operating temperature: 40 - 140°F
- Operating pressure: 5 - 125 psi
- 3/8" compression female inlet
- Vandal resistant housing hardware
- Built-in check valve with cleanable filter included
- 30 second timeout feature
- 1 1/4" mounting hole required

SPECIFICATIONS

- Single-hole wall mount, non-mixing, automatic, lavatory faucet with chrome plated, solid, all metal construction. Included faucet, sensor assembly, 6V DC slow-closing solenoid valve, optional plug-in power adapter, armored/vandal resistant faucet input power cable, one (1) 3/8" braided S.S. supply line, one (1) in-line filter, 0.5 GPM vandal resistant aerator and all necessary faucet mounting hardware.
Features include: All valve components (sensor connector, control module (PCB) and solenoid valve) are housed in an sealed, vandal resistant, nonmetallic box for easy access and quick installation.

OPTIONS

- **AC Adapter - Model # 16-199**
 - AC Adapter Input: 120VAC 50/60 Hz input-7.5VDC
 - AC Adapter Output: 12 VDC 800mA
 - 038 A/Class 2 UL/CSA transformer



APPROVED BY:

CERTIFICATIONS:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Printed in the USA

Krowne Metal Corporation

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129
sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

Rev. 09/2011
No. 16-190



ROYAL SERIES PLUMBING ELECTRONIC FAUCETS


MODEL: _____ PROJECT: _____ ITEM #: _____ QTY: _____

MODELS

Model Numbers	Spout Size	Depth (Front to Back) Ⓐ	Height (Mounting Center to Spout Tip) Ⓑ	Overall Height Ⓒ	Weight (lbs.)
16-190	3" Gooseneck	4 ⁹ / ₁₆ "	6 ¹ / ₄ "	8 ¹⁵ / ₁₆ "	7
16-191	6" Gooseneck	6 ³ / ₄ "	6 ¹⁵ / ₁₆ "	10 ³ / ₄ "	7
16-192	6" Spout with Adapter	7 ¹ / ₂ "	3 ¹ / ₈ "	5 ³ / ₈ "	7

Optional Accessory: 16-199 AC Adapter

DRAWING

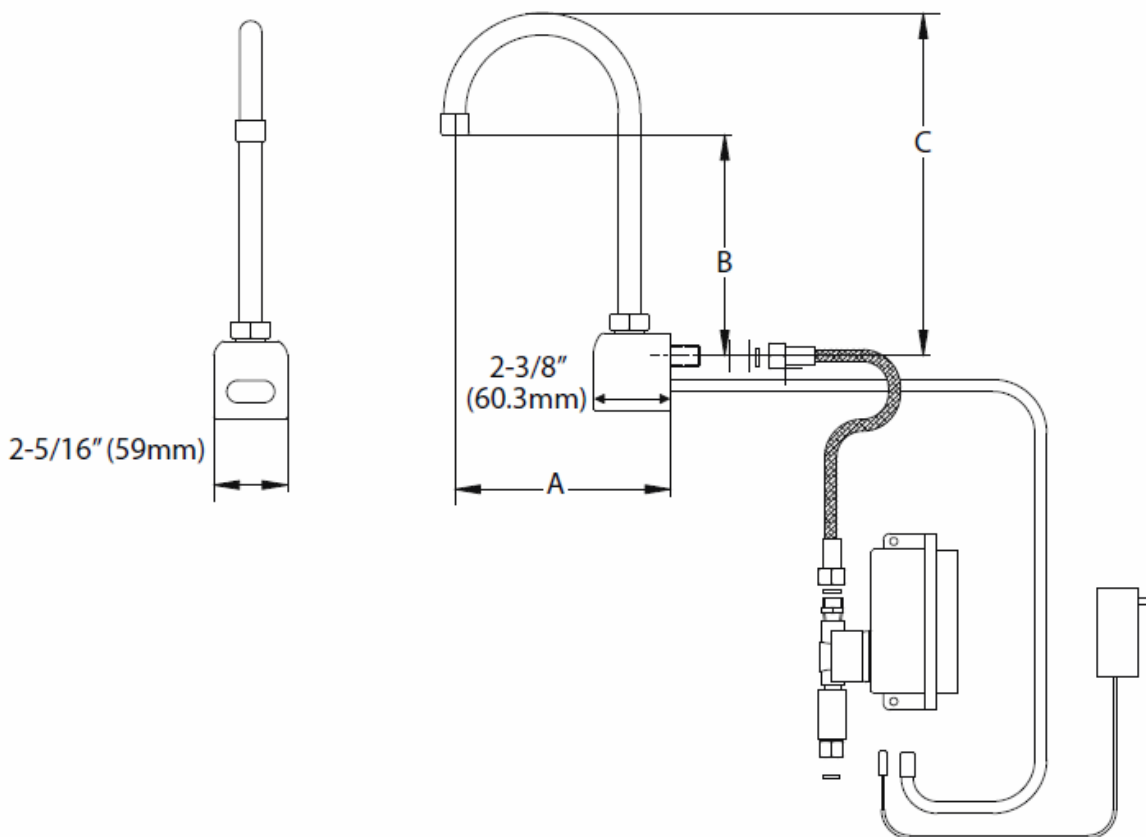

APPROVED BY:

CERTIFICATIONS:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Printed in the USA

Krowne Metal Corporation

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129
sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

Rev. 09/2011
No. 16-190