FCA173018T-00006

FIBERGLASS / PCX POLYMER CONCRETE ASSEMBLY

17" x 30" x 18" (For actual dimensions see drawing)

Fiberglass / Polymer Concrete Assembly, Tapered Sides, WUC 3.6, ANSI/SCTE 77-"T15/20K," 3/8" Hex Bolts, Standard Nameplate (Specify at time of order) Installed

LOAD RATINGS

Incidental Traffic - Parking Lot, Sidewalk Conforms to:

- WUC 3.6
- ASTM C 857
- ANSI/SCTE 77

FEATURES:

- USDA/RUS Approved
- Drop-In nameplateShipped assembled
- Skid resistant cover
- Stainless steel bolts
- Cast-in floating nut box
- Integral drain holes

Additional product information continued on the reverse



2626 Kansas Avenue Riverside, California 92507


951.787.0600

951.787.0632 (fax)

info@newbasis.com

newbasis.com



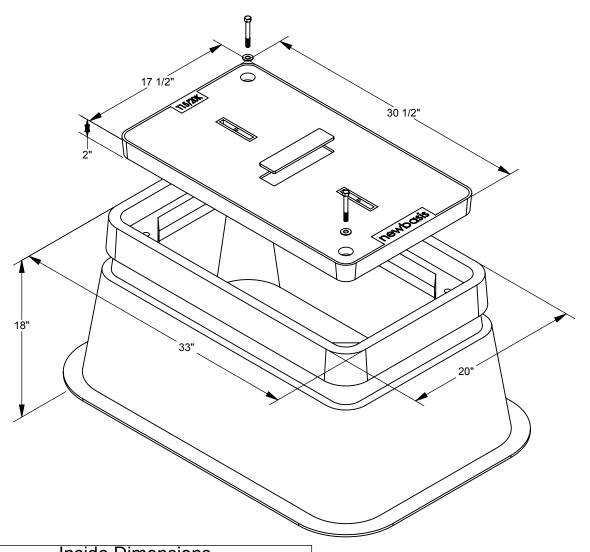

inside Dimensions		
Length	Width	Depth
28 3/4"	15 3/4"	16"
37 1/8"	24 1/8"	

Rev: B.1

FCA173018T-00006

FIBERGLASS / PCX POLYMER CONCRETE ASSEMBLY





Fiberglass / Polymer Concrete Assembly, Tapered Sides, WUC 3.6, ANSI/SCTE 77-"T15/20K," 3/8" Hex Bolts, Standard Nameplate (Specify at time of order) Installed

17" x 30" x 18"

For actual dimensions, see drawing on front side.

NAMEPLATE

FIBERGLASS BODY

PC RING

LOCATION

LIFT PIN FOR HAND HOLE COVER HOOK (NEWBASIS P/N: 0701 OR EQUIVALENT)

OPEN BOTTOM

AVAILABLE OPTIONS

□Penta Bolts

□Telephone EMS

□Power EMS

□2 Racks □Knockouts

□Custom Nameplate Installed

□Custom Nameplate Shipped Separately

□Standard Nameplate Shipped Separately

NAMEPLATES

One standard nameplate included with each assembly, installed at the factory or easily installed in the field. Custom nameplates are available. Contact customer service.

- Telephone
- Fiber Optic
- Street Lighting
- Traffic
- CATV
- Communications

Standard Nameplates

- Electric

☑ - Indicates a selected option

MATERIAL PROPERTIES **AND ATTRIBUTES**

Compressive Strength Polymer Concrete - 11,500 PSI FRP - 19.440 PSI Per ASTM D695

Flexural Strength Polymer Concrete - 4,000 PSI FRP - 16,830 PSI Per ASTM D790

Coefficient of Friction (Drv) 1.085

Per ASTM C1028

Polymer Concrete

- Advanced composite: Very high strength to weight ratio
 - Non-metallic
- Non-conductive
- UV Resistant
- High impact resistant
- Impervious to chemicals and moisture

Materials tested in accordance with ASTM D-543 and ASTM D-570

WEIGHTS AND SHIPPING

COVER WEIGHT: 49.5 lbs.

BOX WEIGHT: 69.1 lbs.


ASSEMBLY WEIGHT: 118.6 lbs.

LOADED PALLET WEIGHT: 1.237 lbs.

Standard shipping includes van delivery of pallet quantities to the lower 48 states. Partial pallet quantities and flat bed shipping available at an additional cost.

PACKAGING (Steel Banding, Edge Protection)

PALLET QUANTITY: 10



Rev: B.1