

Delta® HT-E-SEER-T

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

Delta® HT-E-SEER-T

Models

Delta HT-E-SEER-T

Tall/Freestanding Design



Standard Features

- Steam Elimination
- Energy Recovery System collects the hot water vapor inside the machine and uses it to preheat the incoming rinse water
- Operates on a single cold water connection
- Soft Start helps protect glassware from chipping and breaking
- 14" (355.6 mm) high stand allows for storage of chemicals under the machine
- Stainless steel rear dress panel
- Automatic fill
- Push button start
- Built-in booster heater with Sani-Sure™ final rinse system
- Door interlock
- Pressure regulator
- Water hammer arrestor
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Solid state controls
- Digital LED display
- Delime cycle
- Simplified controls allow easy access for operation and service
- Built-in chemical pumps and priming switches

Mandatory Specs

Specify voltage _____

Options

- ☐ Drain Water Tempering Kit
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack

NOTE: A vent hood is not recommended above the Jackson Delta HT-E-SEER as it does not produce excessive vapors. Always check with the local building code to know what type of ventilation is required for commercial dish machine or glasswasher installations in your area.

Specifications

- High temperature undercounter dishwasher with steam elimination and energy recovery
- Operates on a single cold water connection
- Uses 0.65 gallons (2.47 liters) of water per rack
- Cleans 24 (20)* racks per hour
- Cleans 864 glasses per hour
- 12" (305 mm) chamber clearance

- Three selectable cycles:
Normal - 145 seconds
Heavy - 213 seconds
Extra-Heavy - 313 seconds
- Air insulated between body and stainless steel housing
- One (1) each peg and combination rack included
- Durable stainless steel construction
- 1-year parts and labor warranty



Intertek




Intertek



*Racks per hour calculated with NSF suggested load time of thirty (30) seconds for front opening type

Delta® HT-E-SEER-T

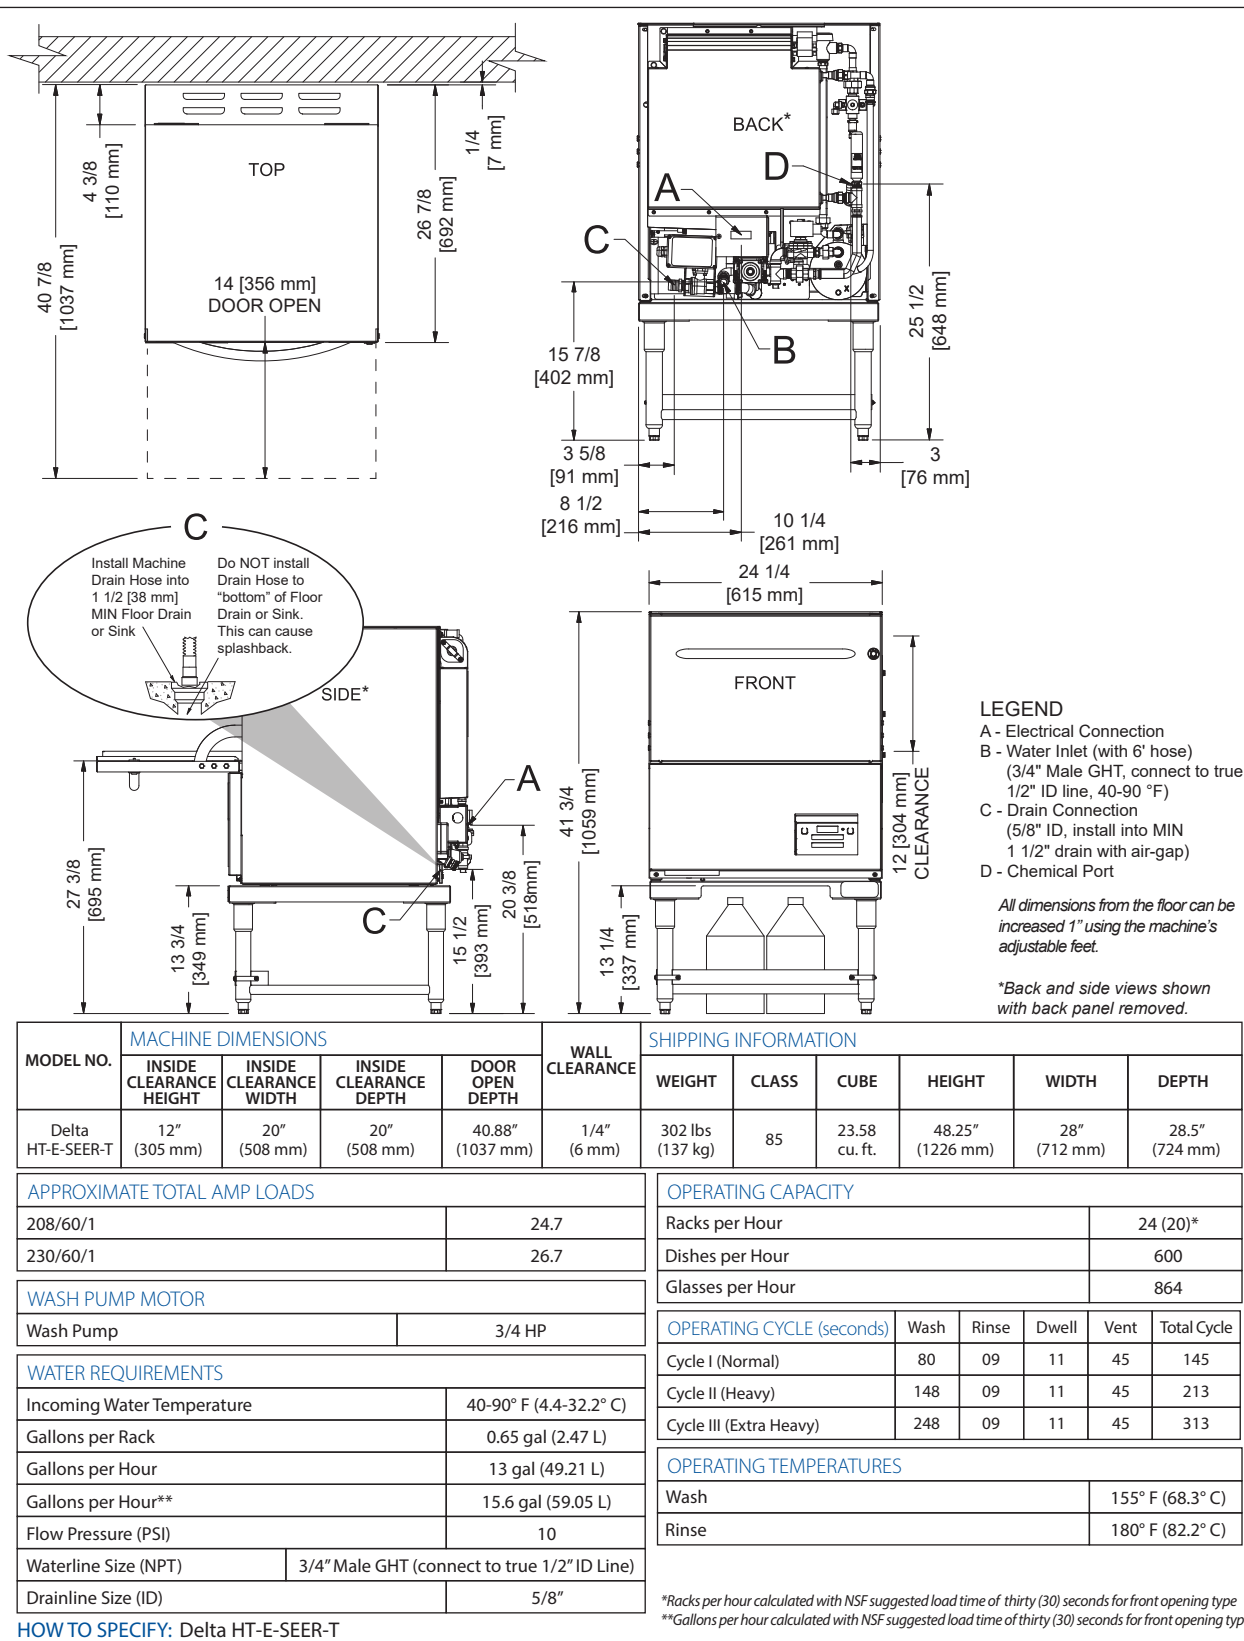

HOW TO SPECIFY: Delta HT-E-SEER-T

Jackson WWS, Inc.
 Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734
 Mailing Address: P.O. Box 1060, Barbourville, KY 40906
 Telephone: 888-800-5672 • Fax: 606-523-1799
 Email: info@jacksonwws.com
 07610-004-54-97 [03/30/21]

www.jacksonwws.com