

COUNTERTOP SINGLE HOB COOKTOP

with New Helios Controls



HELIOS

Helios, CookTek's new enhanced user interface, provides improved reliability and more precise cooking controls. The capacitive touch control includes power percentage or temperature display options.

FEATURES

- Models available in 1800*, 2500, and 3,500 watts
- Available in 100–120 VAC or 200–240 VAC, single phase
- Portable design with stainless steel housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic top
- 4.3" capacitive touch display
- Even heat distribution across bottom of cookware**
- Temperature range from 85°F–425°F (29°C–218°C)
- Automatic pan detection allows for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Sloped front panel allows for easy viewing and operation
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

INCLUDED

- Two-year advanced replacement warranty – U.S. and Canada
- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- Plug and cord (6 ft. nominal)



CERTIFICATIONS



*U.S. only





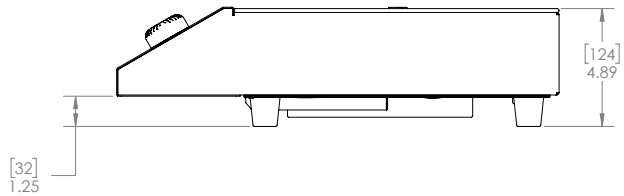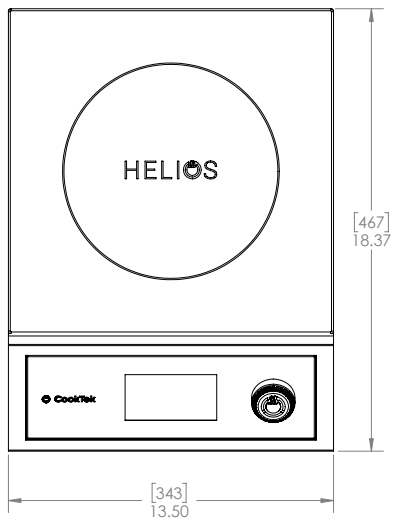




**Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.



DIMENSIONS		
Full Unit Height	4.89"	124 mm
Width	13.5"	343 mm
Depth	18.37"	467 mm
Feet Height	1.25"	32 mm
Weight	19 lb.	8.6 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	9"	229 mm
Packaged Width	18.75"	476 mm
Packaged Depth	20.75"	527 mm
Packaged Weight	24 lb.	10.9 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES			
HTF-9500-SH18-1	Freestanding, 1 hob, 120V, 1800W, US	NEMA 5-15P	
HTF-9500-SH25-1	Freestanding, 1 hob, 240V, 2500W, US	NEMA 6-20P	
HTF-9500-SH35-1	Freestanding, 1 hob, 240V, 3500W, US		
UK AND SAUDI ARABIA			
HTF-9500-SH25-2	Freestanding, 1 hob, 2500W, 240V	BS1363 13A, 230V	
HTF-9500-SH35-2	Freestanding, 1 hob, 3500W, 240V	IEC 309 16A, 3-pin	
INTERNATIONAL			
HTF-9500-SH25-3	Freestanding, 1 hob, 2500W, 240V	CEE 7/7 Schuko 16A, 250V	
HTF-9500-SH35-3	Freestanding, 1 hob, 3500W, 240V		
AUSTRALIA			
HTF-9500-SH25-4	Freestanding, 1 hob, 2500W, 240V	AS/NZS 3112:2000 10A, 250V	
HTF-9500-SH35-4	Freestanding, 1 hob, 3500W, 240V	AS/NZS 3112:2000 15A, 250V	
JAPAN			
HTF-9500-SH25-6	Freestanding, 1 hob, 2500W, 240V		
HTF-9500-SH35-6	Freestanding, 1 hob, 3500W, 240V		
SOUTH AFRICA			
HTF-9500-SH25-7	Freestanding, 1 hob, 2500W, 240V	BS 546 16A, 250V	
HTF-9500-SH35-7	Freestanding, 1 hob, 3500W, 240V		
ISRAEL			
HTF-9500-SH25-8	Freestanding, 1 hob, 2500W, 240V,	SI 32 16A, 250V	
HTF-9500-SH35-8	Freestanding, 1 hob, 3500W, 240V		

Dedicated circuit required for each installation.