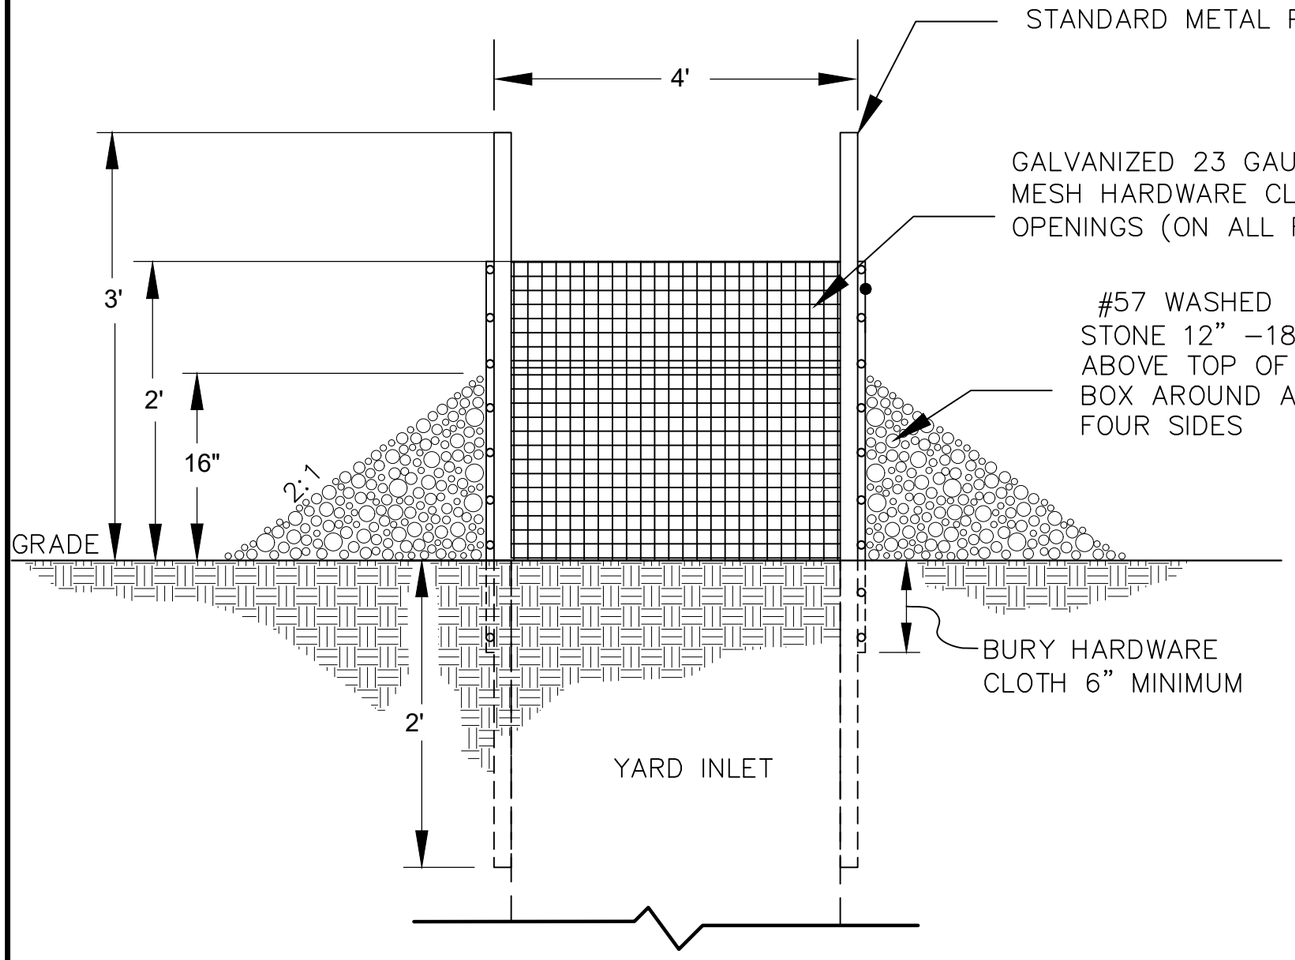

FRONT SECTION VIEW

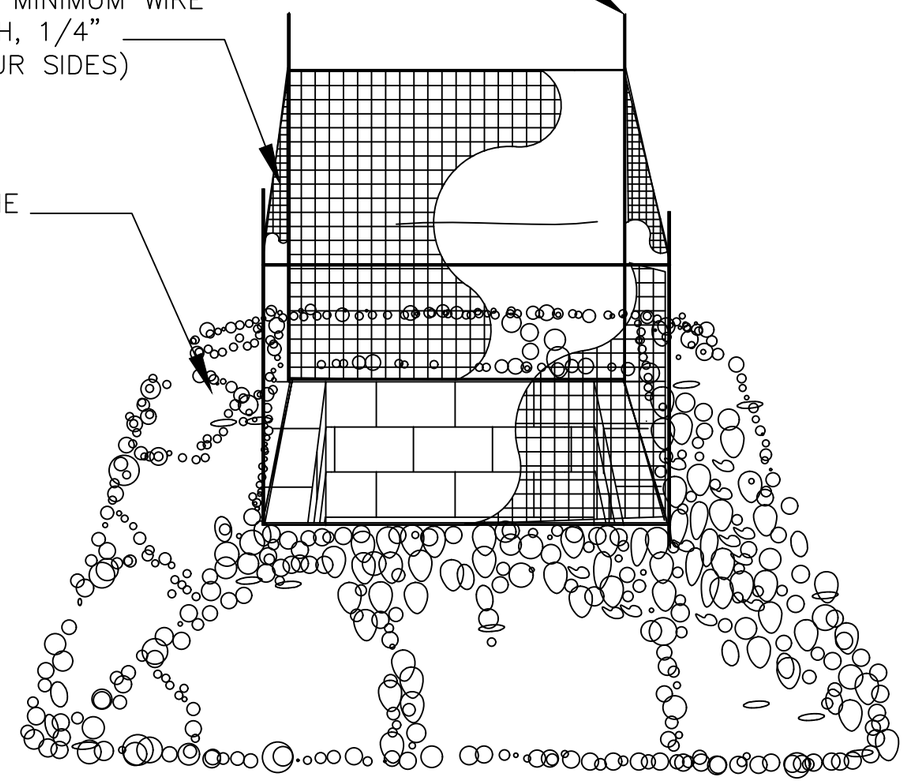

ISOMETRIC VIEW

MAINTENANCE NOTES:

1. REMOVE SEDIMENT WHEN HALF HEIGHT OF STONE AND CLEAR HARDWARE OF DEBRIS TO PROVIDE ADEQUATE FLOW FOR SUBSEQUENT RAINS, TAKING CARE NOT TO DAMAGE OR UNDERCUT HARDWARE DURING SEDIMENT REMOVAL.
2. REPLACE STONE AS NEEDED.

WAKE COUNTY
NORTH CAROLINA

EFFECTIVE: 10/15/2025

STANDARD GRAVEL YARD INLET PROTECTION