



MAINTENANCE NOTES:

1. INSPECT THE BASIN AND RISER ON A REGULAR BASIS AND AFTER EVERY SIGNIFICANT RAINFALL EVENT (1 INCH OR GREATER).
2. INSPECT THE RISER FOR PROPER OPERATION. REMOVE DEBRIS FROM AROUND THE RISER OR THE TRASH RACK.
3. CHECK THE SKIMMER FOR PROPER FUNCTIONING AND TO VERIFY THAT IT IS NOT CLOGGED WITH SEDIMENT.
4. MAKE SURE THE VENT PIPE ON THE SKIMMER IS TURNED UPRIGHT.
5. INSPECT THE BARREL FOR SEEPAGE AROUND THE PIPE AT THE OUTLET.
6. INSPECT THE EMBANKMENT, BAFFLES, OVERFLOW SPILLWAY AND OUTLET FOR EROSION DAMAGE. □ AT A MINIMUM, REMOVE SEDIMENT WHEN THE BASIN VOLUME REACHES 50% OF THE TOTAL STORAGE VOLUME AND AS NEEDED.

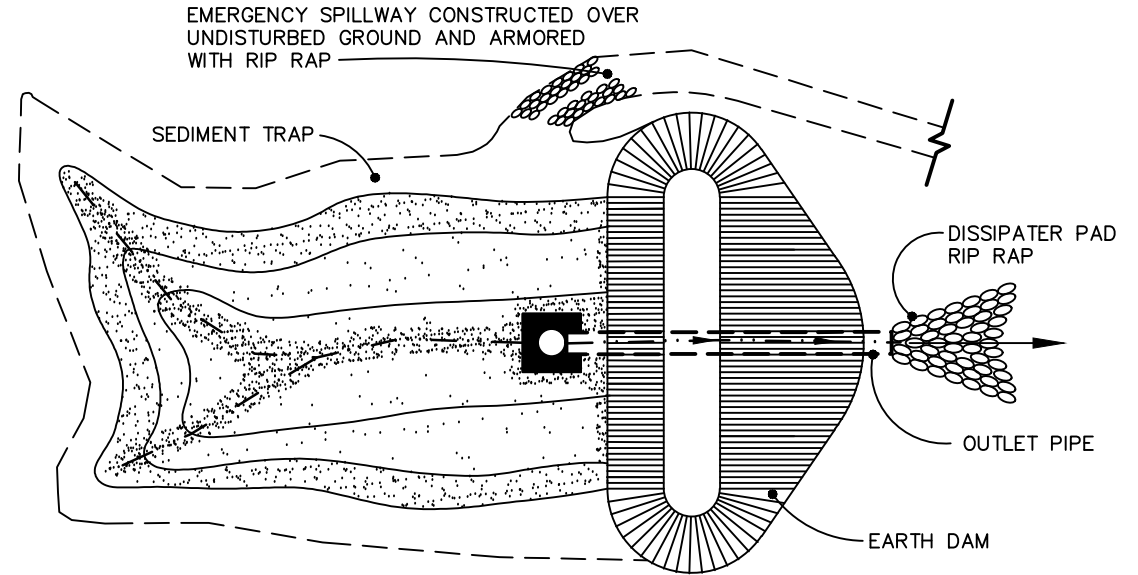

PLAN VIEW

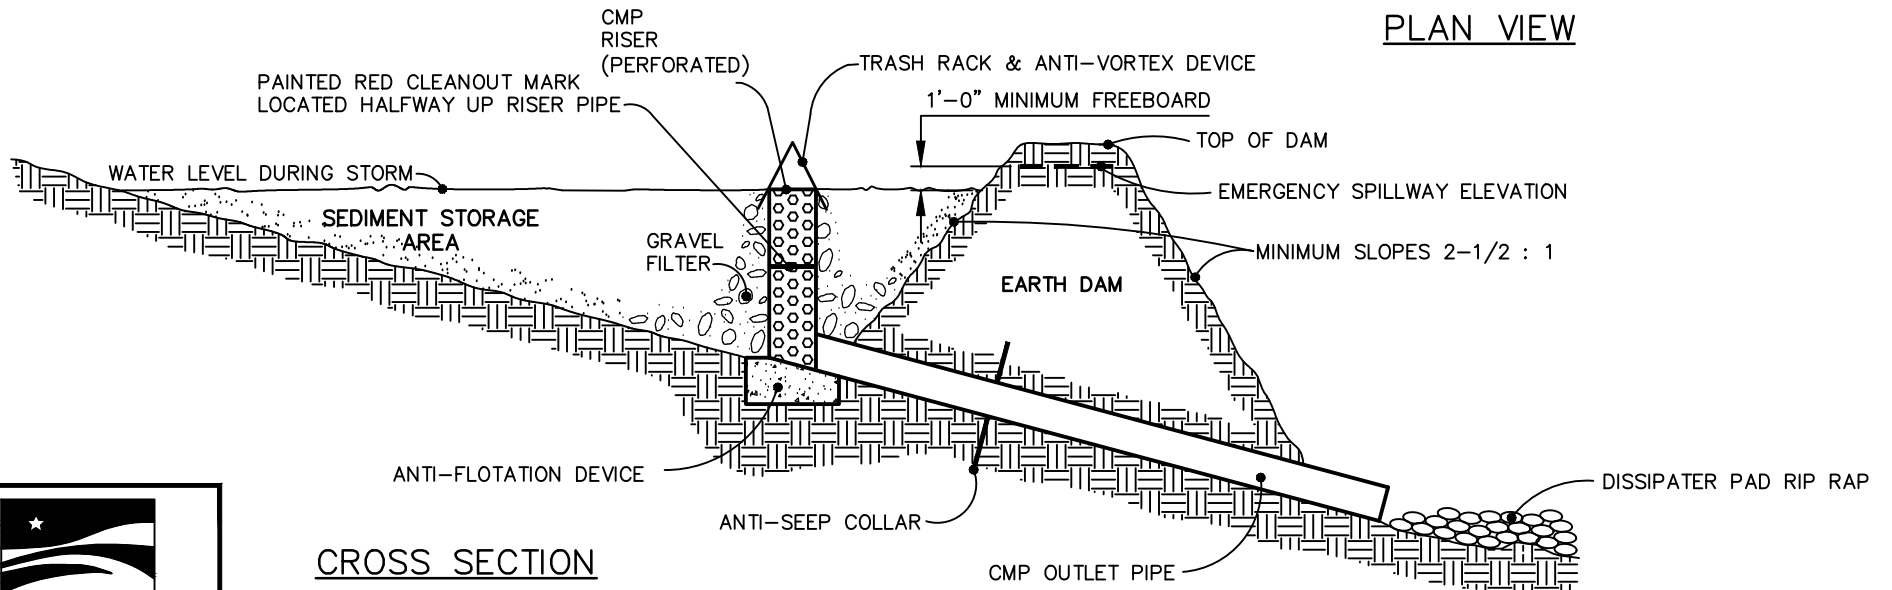

CROSS SECTION

STANDARD RISER-BARREL SEDIMENT BASIN

