





## COMPONENTS

---

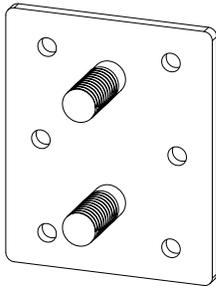


Bracket Plate  
x2

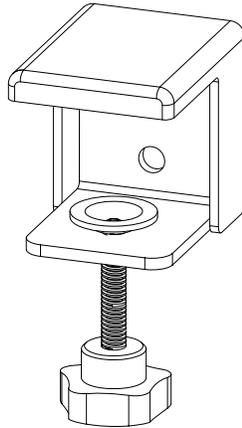

Clamp  
x2




M8 Nut  
x4



Self Tapping Screw  
x8

## PHASE 1 | Back Screen


---

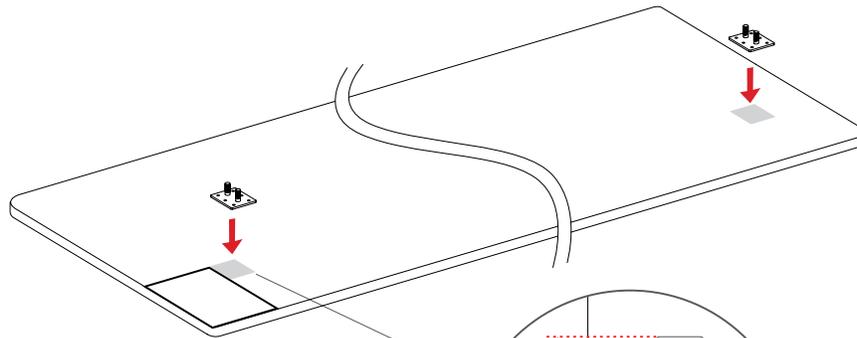

### Step 1

Lay down the back screen horizontally and position the bracket plates at the same height on the screen as shown in the diagram below.

\*For the recommended spacing, print-out and use the template provided on page 6.

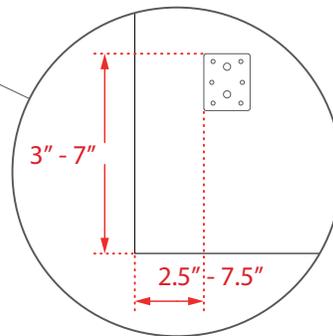


## PHASE 1 | Back Screen

---

### Step 2


Screw in four self tapping screws to secure each bracket plate to the back screen.

**Note:** Make sure to set your power tool at low torque for inserting screws into the screen.

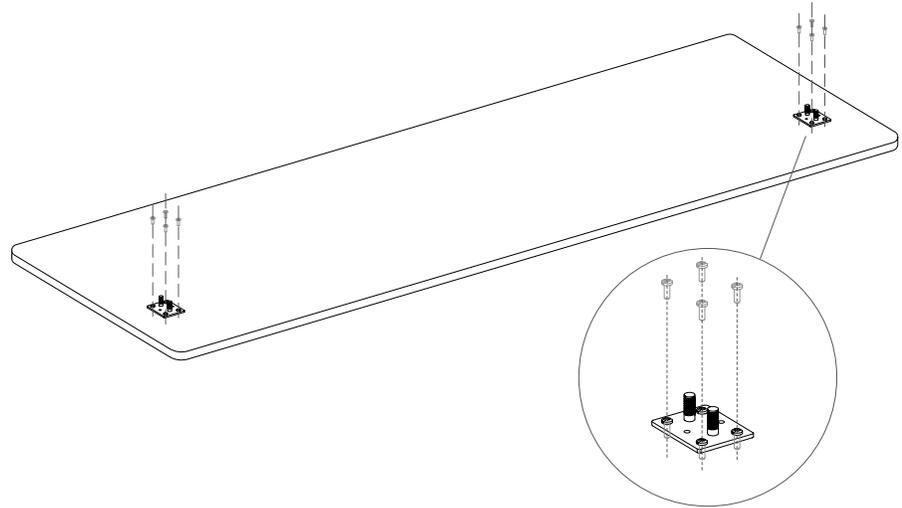

### Step 3

Place the clamps onto the bracket plates and use two M8 nuts to tighten each clamp to the bracket plates.

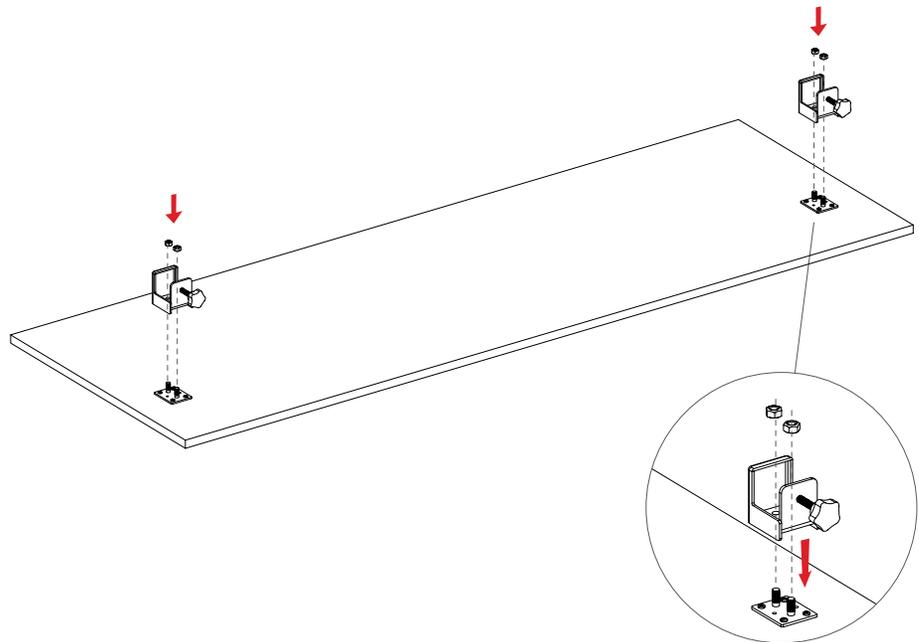


## PHASE 1 | Back Screen

---


### Step 4

Slide the back screen and clamps onto the worksurface and tighten the knobs to secure the screen to the worksurface as shown in the diagram below.

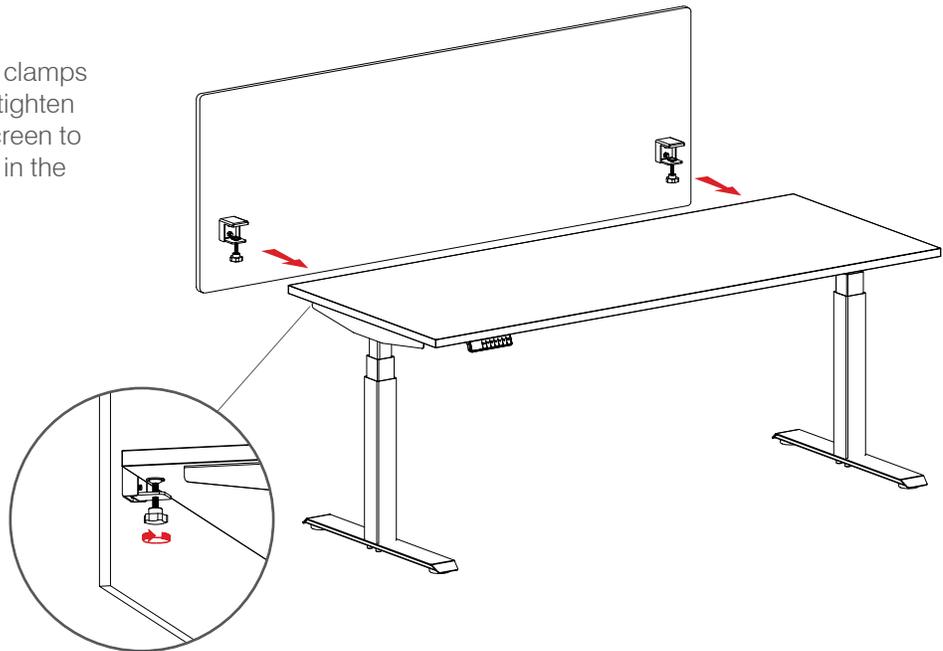


### Step 5

Your set up is now complete.

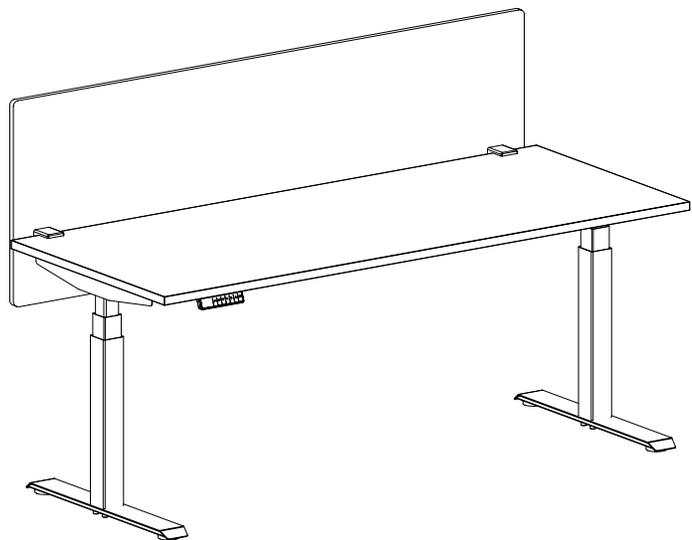

## PHASE 2 | Side Screen


**NOTE:** on a 24" deep worksurface at least 1.5" clearance is required between the edge of the worksurface and the cantilever.

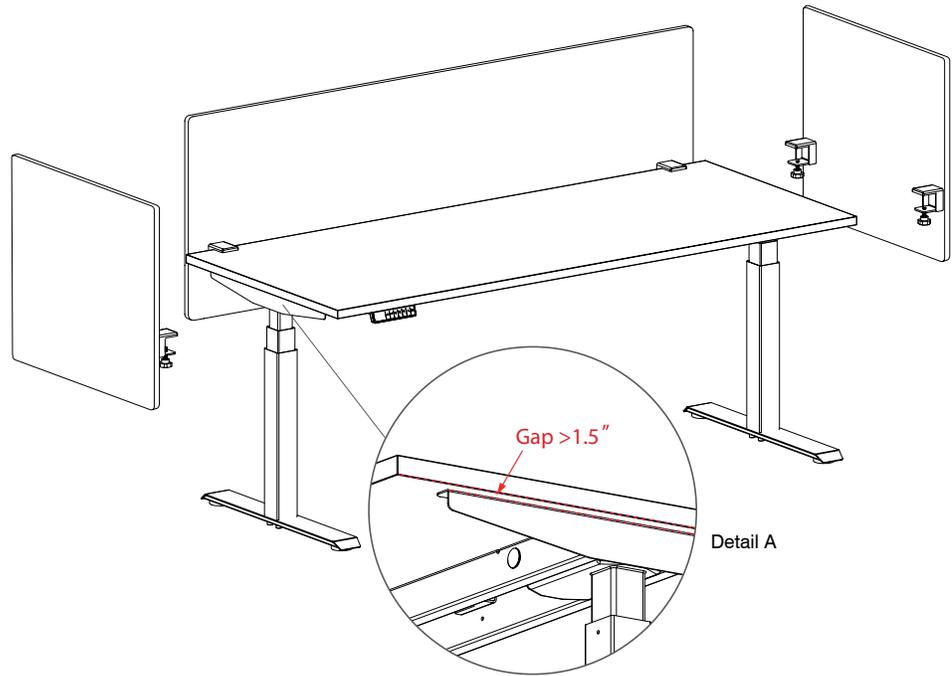

### Step 1


Slide the side screen and clamps onto the worksurface and tighten the knobs to secure the screen to the worksurface. Recommended distance from the edge of the worksurface is 1.5 to 3 inches.

Your set up is now complete.

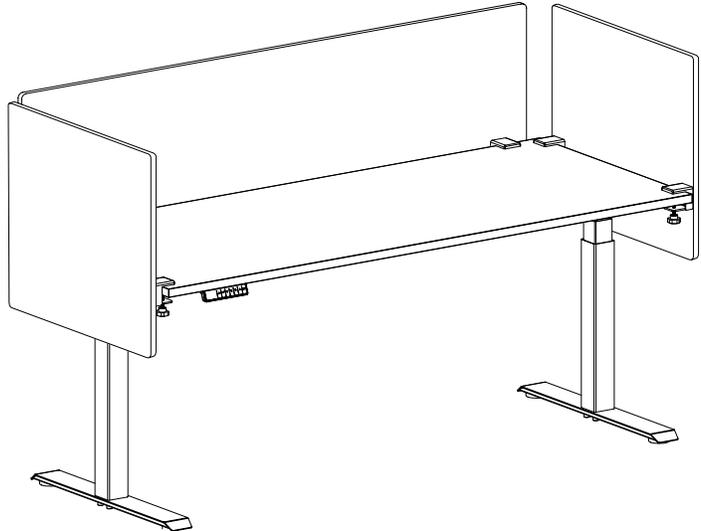



## PHASE 3 | Template

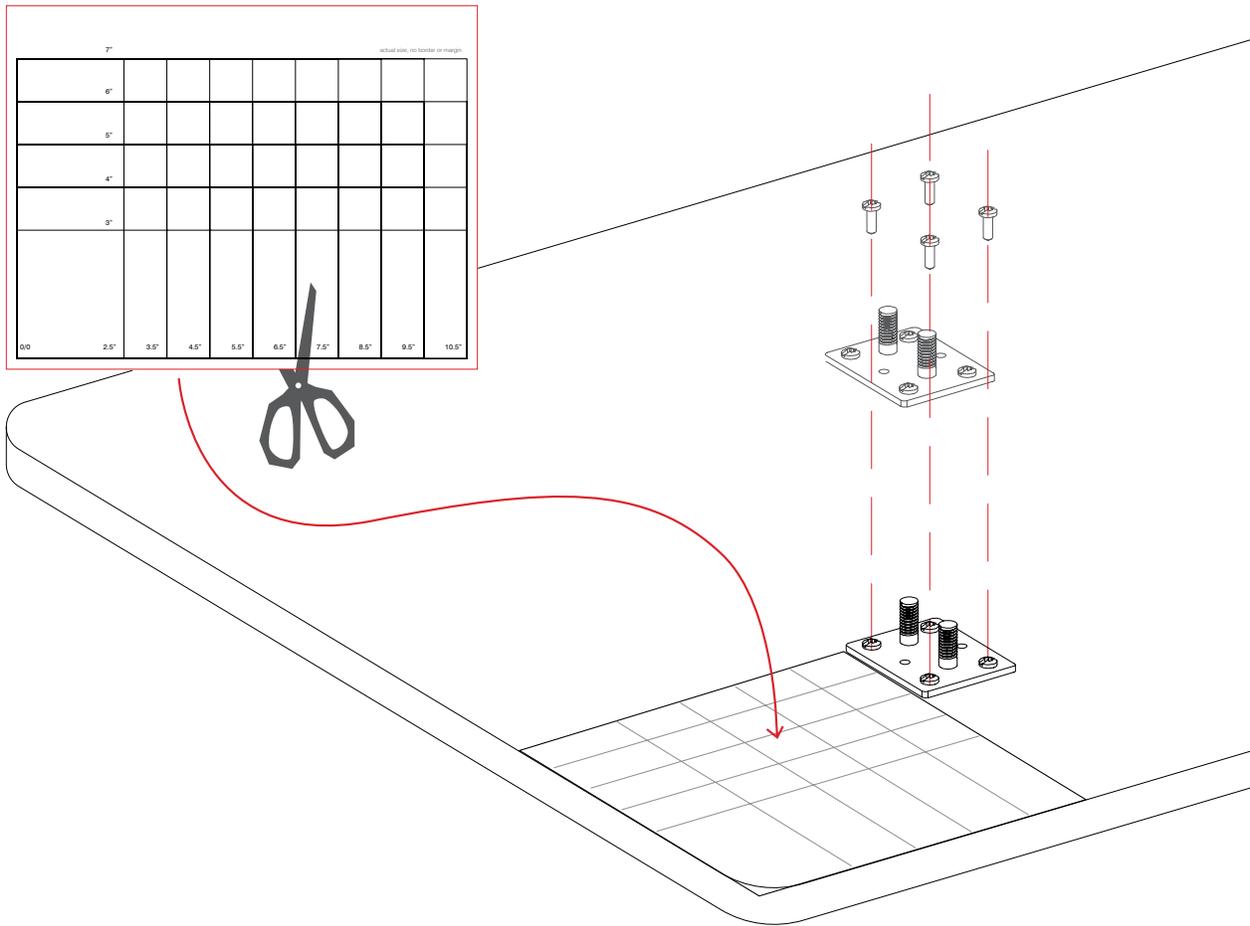

### Step 1

Print out the template as an actual size.

### Step 2

Fold, or cut out the dimension reflecting where you'd like to set the brackets.

### Step 3

Align the edges of the template to the felt board.

### Step 4

Align the bracket plate to the template edge, on the felt board.

### Step 5

Screw down the bracket plate.

Please contact [cc@amqsolutions.com](mailto:cc@amqsolutions.com) if you are missing any parts, have difficulty with assembly, or have any product related questions.